
K-SCHALLDAE FRUEHWARNFUKT

Silencers with early warning function

Eigenschappen

Werkdruk	5 bar
Bedrijfstemperatuur	Max. 70 °C
Norm	G thread acc. to DIN EN ISO 228-1
Materiaal	PP



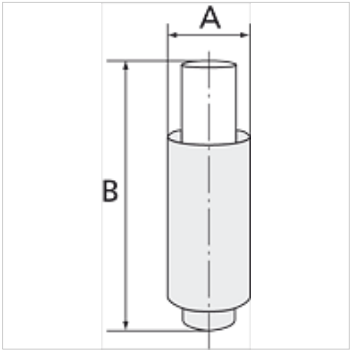

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

The silencer’s warning indicator gives an early warning if the back pressure in the system is too high. Maintenance personnel can both see and hear (from the elevated sound level) that it is time to replace the silencer before costly and unnecessary disruptions impair operation.
The design is based on a two-chamber system with inner and outer silencing chambers.
The inner diffuser serves as a warning indicator that is pressed out when back pressure is too high.
The silencer should be replaced as soon as the inner diffuser extends far enough to show the red marking on the warning indicator.

Artikel

Aanduiding	Schroefdraad	A (mm)	B (mm)	Debiet (L/min)	Geluidsniveau (dBA)	Geluidsreductie
K- 07 40 15 22	G 1/8 male	15,7	35,5	450	65,5	32 dB(A)
K- 07 40 15 23	G 1/4 male	19,6	42,6	883	66,5	33 dB(A)
K- 07 40 15 24	G 3/8 male	26,8	57,0	1480	73,2	30 dB(A)
K- 07 40 15 25	G 1/2 male	32,4	73,5	1910	76,5	33 dB(A)

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.