



# K-MEHRFACHVERT AG 4 1

Distributors with male thread, 4 outlets, swivel type, parallel male thread with O-ring (max. 10 bar)

**HANSA FLEX**

## Eigenschappen

Werkdruk	Max. 10 bar
Toepassingsgebied	Air, vacuum
aanbevolen slangen	PU or PA (nylon)
Middelen	Compressed air and all gases or liquids that are compatible with the materials
Temperatuurgebied	-20 °C to +80 °C
Dichtvlak	Parallel version: O-ring in housing
Materiaal	Plastic, Nickel plated brass
Aandrukking	Plastic

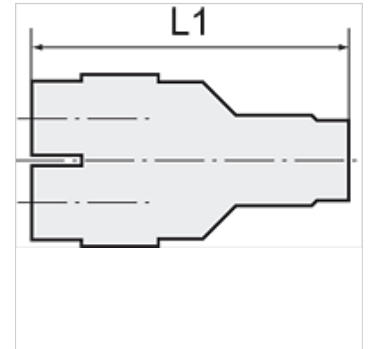

## Aanwijzing

Andere gegevens op aanvraag.

## Beschrijving

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Artikel

Aanduiding	Schroefdraad	voor uitw. slang-Ø	L1 (mm)
K- 07 40 43 43	G 1/8	4 mm	43,0
K- 07 40 43 44	G 1/8	6 mm	46,5
K- 07 40 43 41	G 1/4	4 mm	45,5
K- 07 40 43 42	G 1/4	6 mm	49,0