



K-XRD STECKANSCHLUSS Z GEW AGR OR

Straight non-return valves, flow direction from tube to port, parallel male thread with O-ring

HANSA FLEX

Eigenschappen

Werkdruk	Max. 10 bar, vacuum
Toepassingsgebied	Air, vacuum
aanbevolen slangen	PU or PA (nylon)
Middelen	Perslucht
Norm	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring
Temperatuurgebied	0 °C to +60 °C
Dichtvlak	O-ring (NBR)
Materiaal	Plastic, Nickel plated brass
Aandrukkring	Plastic

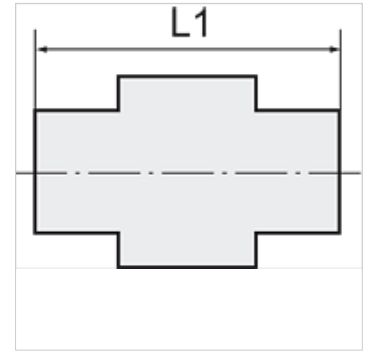

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

The non-return function of these push-in fittings prevents the air from flowing back. The unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

Artikel

Aanduiding	Schroefdraad	voor uitw. slang-Ø	L1 (mm)	Openingsdruk (bar)	SW
K- 07 40 08 83	M 5	4 mm	31,0	0,2	10 mm
K- 07 40 08 78	G 1/8	4 mm	24,2	0,2	14 mm
K- 07 40 08 79	G 1/8	6 mm	31,0	0,2	14 mm
K- 07 40 08 80	G 1/8	8 mm	32,8	0,2	14 mm
K- 07 40 08 76	G 1/4	6 mm	33,0	0,2	17 mm
K- 07 40 08 77	G 1/4	8 mm	34,8	0,2	17 mm
K- 07 40 08 81	G 3/8	10 mm	41,0	0,2	20 mm
K- 07 40 08 82	G 3/8	12 mm	42,5	0,2	21 mm
K- 07 40 08 74	G 1/2	10 mm	43,0	0,2	24 mm
K- 07 40 08 75	G 1/2	12 mm	44,5	0,2	24 mm