


K-WV 5/2 BEIDS ELEKTRO

5/2-way spool valves, double solenoid

HANSA FLEX

Eigenschappen

| | |
|--------------------------------|---|
| Functie | 5/2-way |
| Werkdruk | 2.5 - 10 bar; Max. vacuum 10 bar (external pilot air) |
| min. werkdruk | 2,5 bar |
| Temperatuurgebied | -10 °C to +60 °C |
| Debiet 6bar en 10bar | 1500 NI/min (G 1/4), 4600 NI/min (G 1/2) |
| Elektrische aansluiting | Coupler plug PG 9 - form B |
| Beschermingsklasse | IP 65 (DIN 46244) |
| Behuizing | Anodised aluminium, blue |
| Zuigerschuif | Stainless steel |
| Afdichtmateriaal | NBR |

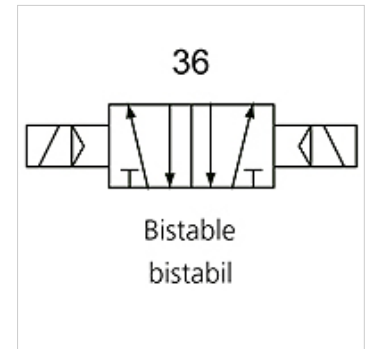

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

This valve design, featuring the Tapered Tee Seal®, offers the ability to run without lubrication and supports almost any compressed air quality. The valves are largely resistant to dirt and can thus also be used under extreme conditions without any problems. Leakage is now a thing of the past and the spool no longer sticks, even after long idle periods.

Artikel

| Aanduiding | Aansluiting | Spanning | DN | Schakelschema nummer | Besturing |
|----------------|-------------|-----------------|----|----------------------|-----------|
| K- 07 15 02 25 | G 1/4 | 24 V DC | 8 | 36 | |
| K- 07 15 02 26 | G 1/2" | 24 V DC | 15 | 36 | |
| K- 07 15 02 27 | G 1/4 | 230 V AC, 50 Hz | 8 | 36 | |
| K- 07 15 02 28 | G 1/2" | 230 V AC, 50 Hz | 15 | 36 | |