


# K-WV 5/2 BEIDS ELEKTRO

5/2-way spool valves, double solenoid

**HANSA FLEX**

## Eigenschappen

<b>Functie</b>	5/2-way
<b>Werkdruk</b>	2.5 - 10 bar; Max. vacuum 10 bar (external pilot air)
<b>min. werkdruk</b>	2,5 bar
<b>Temperatuurgebied</b>	-10 °C to +60 °C
<b>Debiet 6bar en 10bar</b>	1500 NI/min (G 1/4), 4600 NI/min (G 1/2)
<b>Elektrische aansluiting</b>	Coupler plug PG 9 - form B
<b>Beschermingsklasse</b>	IP 65 (DIN 46244)
<b>Behuizing</b>	Anodised aluminium, blue
<b>Zuigerschuif</b>	Stainless steel
<b>Afdichtmateriaal</b>	NBR

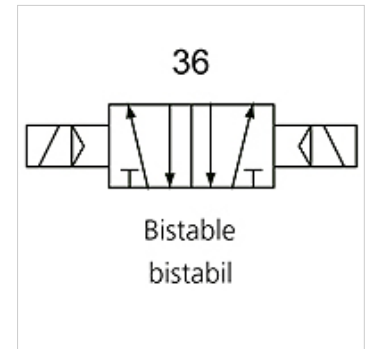

## Aanwijzing

Andere gegevens op aanvraag.

## Beschrijving

This valve design, featuring the Tapered Tee Seal®, offers the ability to run without lubrication and supports almost any compressed air quality. <br>The valves are largely resistant to dirt and can thus also be used under extreme conditions without any problems. <br>Leakage is now a thing of the past and the spool no longer sticks, even after long idle periods.

## Artikel

Aanduiding	Aansluiting	Spanning	DN	Schakelschema nummer	Besturing
K- 07 15 02 25	G 1/4	24 V DC	8	36	
K- 07 15 02 26	G 1/2"	24 V DC	15	36	
K- 07 15 02 27	G 1/4	230 V AC, 50 Hz	8	36	
K- 07 15 02 28	G 1/2"	230 V AC, 50 Hz	15	36	