
K-ELEKTRISCHE ANSCHLUESSE

Electrical connection (multi-pole, 25-pin, IP 65)

HANSA-FLEX

Eigenschappen

Middelen	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Werkdruk	Max. vacuum 10 bar (external pilots), 3 to 7 bar (internal pilots as standard)
Regeldruk	3 - 7 bar
Temperatuurgebied	-10 °C to +60 °C
Debiet	200 Nl/min (Ø 4), 500 Nl/min (Ø 6), 800 Nl/min (Ø 8)
Aantal aansturingen	Max. 16 (e.g. 16 spring return valves)
Handmatige hulpbediening	Latching (bistable), Monostable (non-latching) version also available on request
Opgenomen vermogen	0.6 W per pilot
Beschermingsklasse	IP 65

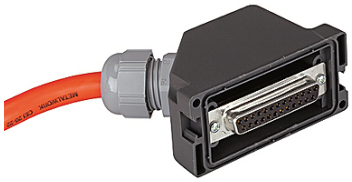

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

These compact valve terminals, with a maximum flow rate of 800 Nl/min, can be individually adapted to the specific conditions of each application thanks tot he wide range of functions and various input and intermediate plates.Since each valve terminal is a customer-specific combination of a series of individual elements, the catalogue only lists the available input, intermediate and end plates as well as the different valve discs and the 25-pin multi-pole connectors.

Extra informatie

Important: The scope of supply does not include a connector. Please order separately.

Artikel

Aanduiding	Definitie
K- 07 15 22 45	IP 67 connector, 25-pin, with 1 m cable
K- 07 15 22 46	IP 67 connector, 25-pin, with 2.5 m cable
K- 07 15 22 47	IP 67 connector, 25-pin, with 5 m cable

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.