

K-VSTO POM
Plugs

Eigenschappen

Werkdruk	0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm)
Bedrijfstemperatuur	-20 °C to +70 °C in air; +1 °C to +70 °C in water
Materiaal	Acetalpolymerisat (POM)
Afdichtmateriaal	NBR



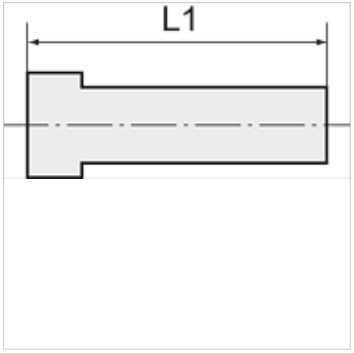

Aanwijzing
Andere gegevens op aanvraag.

Beschrijving
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artikel

Aanduiding	Kleur	L1 (mm)	Sok (mm)
K- 07 40 29 11	rood	28,0	4
K- 07 40 29 12	rood	28,0	5
K- 07 40 29 13	rood	30,0	6
K- 07 40 29 14	rood	31,0	8
K- 07 40 29 15	rood	36,5	10
K- 07 40 29 16	rood	38,5	12
K- 07 40 29 17	Zwart	45,0	15
K- 07 40 29 18	Zwart	41,5	18
K- 07 40 29 19	Zwart	45,0	22
K- 07 40 29 20	Zwart	56,0	28

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.