
K-RD STUECKE PP

Reducers

Eigenschappen

Werkdruk	on request
Bedrijfstemperatuur	Max. +20 °C
Materiaal	Polypropylene (PP)
Afdichtmateriaal	NBR



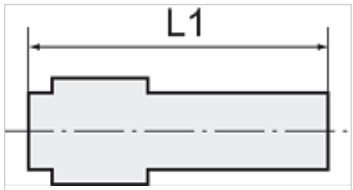

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artikel

Aanduiding	voor uitw. slang-Ø	L1 (mm)	Sok (mm)
K- 07 40 29 00	22 mm	127,0	32
K- 07 40 29 01	28 mm	133,3	32

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.