


# K-RD STUECKE PP

Reducers

**HANSA FLEX**

## Eigenschappen

|                     |                    |
|---------------------|--------------------|
| Werkdruk            | on request         |
| Bedrijfstemperatuur | Max. +20 °C        |
| Materiaal           | Polypropylene (PP) |
| Afdichtmateriaal    | NBR                |

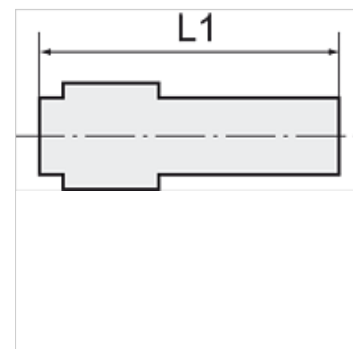

## Aanwijzing

Andere gegevens op aanvraag.

## Beschrijving

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Artikel

| Aanduiding     | voor uitw. slang-Ø | L1<br>(mm) | Sok<br>(mm) |
|----------------|--------------------|------------|-------------|
| K- 07 40 29 00 | 22 mm              | 127,0      | 32          |
| K- 07 40 29 01 | 28 mm              | 133,3      | 32          |