


K-MV G (NC) V 230 V, 50 HZ 1

Normally closed, (NC), pilot-operated, 230 V, 50 Hz

HANSA FLEX

Eigenschappen

| | |
|----------------------------------|---|
| Elektrische aansluiting | device socket type A in acc. with ISO 4400 for all valves with threads G 3/8 & G 1/2, except valves type 3 & 4. Device socket |
| Beschermingsklasse | IP 65 |
| Mediumtemperatuur | max. 80 °C when using water or oils; max. 90 °C when using with air |
| Schroefdraad beschrijving | G thread acc. DIN EN ISO 228-1 |
| Behuizing, ventielzitting | Brass |
| Inwendige delen | Stainless steel |
| Afdichting | FPM |

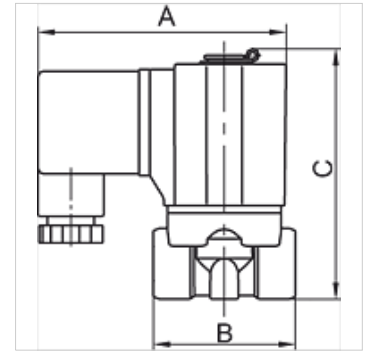

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

Standard series in two different versions: Directly operated, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Artikel

| Aanduiding | Schroefdraad | Max. bedrijfsdruk (bar) | min. bedrijfsdruk (bar) | NW | A (mm) | B (mm) | C (mm) | Constructie |
|----------------|--------------|-------------------------|-------------------------|------|--------|--------|--------|-------------|
| K- 07 30 01 72 | G 1/2 | 10 | 0,50 | 15,0 | 70,0 | 70,0 | 107,0 | 3 |
| K- 07 30 01 73 | G 3/4 | 10 | 0,50 | 20,0 | 70,0 | 82,0 | 115,4 | 3 |
| K- 07 30 01 74 | G 1 | 10 | 0,50 | 25,0 | 70,0 | 92,0 | 124,0 | 3 |