

K-STECKVERSCHR AGR-K SK

Male connectors, conical male thread with outer hex

Eigenschappen

Werkdruk	Max. 16 bar
Bedrijfstemperatuur	-20 °C to +80 °C
Materiaal	messing vernikkeld
Aandrukring	Hostaform
Spanring	Stainless steel



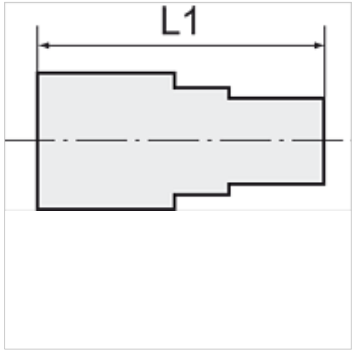

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Artikel

Aanduiding	Schroefdraad	voor uitw. slang-Ø	Binnenzeskant (mm)	L1 (mm)	SW
K- 07 40 24 76	R 1/8	4 mm	3,0	18,5	10 mm
K- 07 40 24 77	R 1/8	6 mm	4,0	22,5	12 mm
K- 07 40 24 78	R 1/8	8 mm	5,0	26,0	13 mm
K- 07 40 24 74	R 1/4	6 mm	4,0	22,3	12 mm
K- 07 40 24 75	R 1/4	8 mm	6,0	25,5	14 mm
K- 07 40 24 73	R 1/4	10 mm	7,0	28,9	16 mm
K- 07 40 24 81	R 3/8	8 mm	6,0	24,9	14 mm
K- 07 40 24 79	R 3/8	10 mm	7,0	28,9	16 mm
K- 07 40 24 80	R 3/8	12 mm	10,0	27,0	19 mm
K- 07 40 24 72	R 1/2	12 mm	10,0	26,6	19 mm

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.