
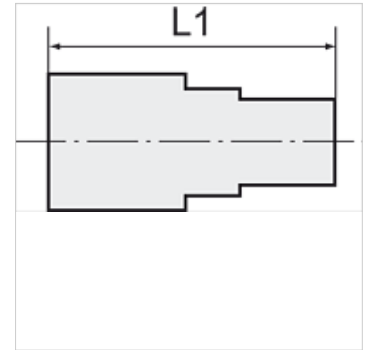


# K-STECKVERSCHR AGR-K SK

Male connectors, conical male thread with outer hex

## Eigenschappen

|                     |                    |
|---------------------|--------------------|
| Werkdruk            | Max. 16 bar        |
| Bedrijfstemperatuur | -20 °C to +80 °C   |
| Materiaal           | messing vernikkeld |
| Aandrukkring        | Hostaform          |
| Spanring            | Stainless steel    |



## Aanwijzing

Andere gegevens op aanvraag.

## Beschrijving

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Artikel

| Aanduiding     | Schroefdraad | voor uitw. slang-Ø | Binnenzeskant (mm) | L1 (mm) | SW    |
|----------------|--------------|--------------------|--------------------|---------|-------|
| K- 07 40 24 76 | R 1/8        | 4 mm               | 3,0                | 18,5    | 10 mm |
| K- 07 40 24 77 | R 1/8        | 6 mm               | 4,0                | 22,5    | 12 mm |
| K- 07 40 24 78 | R 1/8        | 8 mm               | 5,0                | 26,0    | 13 mm |
| K- 07 40 24 74 | R 1/4        | 6 mm               | 4,0                | 22,3    | 12 mm |
| K- 07 40 24 75 | R 1/4        | 8 mm               | 6,0                | 25,5    | 14 mm |
| K- 07 40 24 73 | R 1/4        | 10 mm              | 7,0                | 28,9    | 16 mm |
| K- 07 40 24 81 | R 3/8        | 8 mm               | 6,0                | 24,9    | 14 mm |
| K- 07 40 24 79 | R 3/8        | 10 mm              | 7,0                | 28,9    | 16 mm |
| K- 07 40 24 80 | R 3/8        | 12 mm              | 10,0               | 27,0    | 19 mm |
| K- 07 40 24 72 | R 1/2        | 12 mm              | 10,0               | 26,6    | 19 mm |