


K-XVM ZYL OR PP

Male connectors, parallel male thread with O-ring

HANSA FLEX

Eigenschappen

Werkdruk	on request
Bedrijfstemperatuur	Max. +20 °C
Materiaal	Polypropylene (PP)
Afdichtmateriaal	NBR

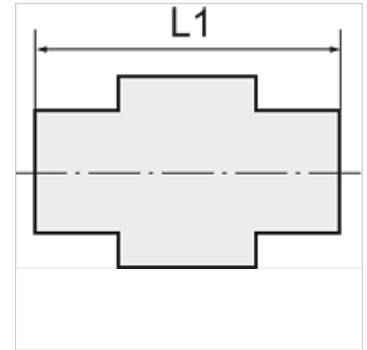

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artikel

Aanduiding	Schroefdraad	voor uitw. slang-Ø	L1 (mm)	SW
K- 07 40 28 39	G 1	32 mm	111,4	46 mm
K- 07 40 28 40	G 1 1/2	32 mm	109,2	49 mm