

K-STECKVERBINDU 1

Straight push-in connector

Eigenschappen

Werkdruk	Max. 16 bar
Bedrijfstemperatuur	-20 °C to +80 °C
Materiaal	messing vernikkeld
Aandrukring	Hostaform
Spanring	Stainless steel



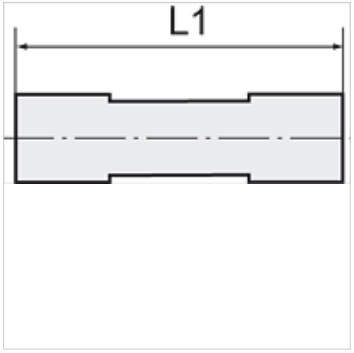

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Artikel

Aanduiding	Schroefdraad	voor uitw. slang-Ø	L1 (mm)
K- 07 40 25 18	M 8 x 0.75	3 mm	18,4
K- 07 40 25 19	M 11 x 1	4 mm	30,6
K- 07 40 25 20	M 14 x 1	5 mm	33,5
K- 07 40 25 21	M 13 x 1	6 mm	33,0
K- 07 40 25 22	M 15 x 1	8 mm	35,7
K- 07 40 25 23	M 17 x 1	10 mm	39,2
K- 07 40 25 24	M 20 x 1	12 mm	39,7
K- 07 40 25 25	M 24 x 1	14 mm	45,9

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.