
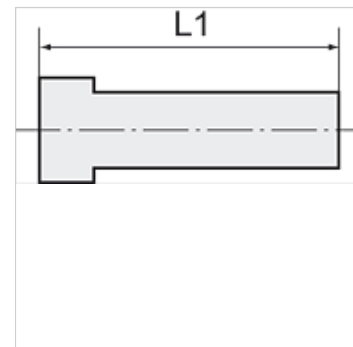


K-VST 1

Plugs

Eigenschappen

| | |
|---------------------|--------------------|
| Werkdruk | Max. 16 bar |
| Bedrijfstemperatuur | -20 °C to +80 °C |
| Materiaal | messing vernikkeld |



Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Artikel

| Aanduiding | Steeknippel (mm) | L1 (mm) |
|----------------|---------------------|------------|
| K- 07 40 26 28 | 3 | 20,0 |
| K- 07 40 26 29 | 4 | 27,0 |
| K- 07 40 26 30 | 5 | 27,0 |
| K- 07 40 26 33 | 6 | 29,8 |
| K- 07 40 26 36 | 8 | 33,6 |
| K- 07 40 26 37 | 10 | 36,8 |
| K- 07 40 26 38 | 12 | 39,0 |
| K- 07 40 26 40 | 14 | 39,5 |