
K-STECKVERSCHR AGR-K SK BESCH

Male connectors, conical male thread, coated with outer hex

Eigenschappen

Werkdruk	Max. 16 bar
Bedrijfstemperatuur	-20 °C to +150 °C
Materiaal	messing vernikkeld
Aandrukring	Nickel-plated brass
Spanring	Stainless steel



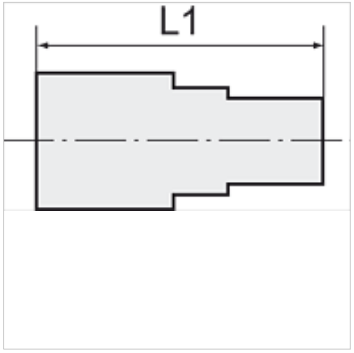

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikel

Aanduiding	Schroefdraad	voor uitw. slang-Ø	L1 (mm)	SW
K- 07 40 27 26	R 1/8	4 mm	22,5	10 mm
K- 07 40 27 27	R 1/8	6 mm	24,5	11 mm
K- 07 40 27 28	R 1/8	8 mm	27,5	13 mm
K- 07 40 47 62	R 1/4	4 mm	22,5	14 mm
K- 07 40 27 24	R 1/4	6 mm	24,5	14 mm
K- 07 40 27 25	R 1/4	8 mm	27,5	13 mm
K- 07 40 27 23	R 1/4	10 mm	32,5	16 mm
K- 07 40 47 61	R 1/4	12 mm	32,5	17 mm
K- 07 40 27 30	R 3/8	8 mm	28,0	17 mm
K- 07 40 27 29	R 3/8	10 mm	32,5	17 mm
K- 07 40 47 63	R 3/8	12 mm	30,5	17 mm
K- 07 40 47 60	R 1/2	12 mm	33,0	22 mm

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.