
K-STECKVERSCH AGR OR SK M O 1


Male connectors, parallel male thread with O-ring and outer hex

HANSA-FLEX

Eigenschappen

Werkdruk	Max. 16 bar
Bedrijfstemperatuur	-20 °C to +150 °C
Materiaal	messing vernikkeld
Aandrukring	Nickel-plated brass
O-ring	FKM (FPM)
Spanring	Stainless steel



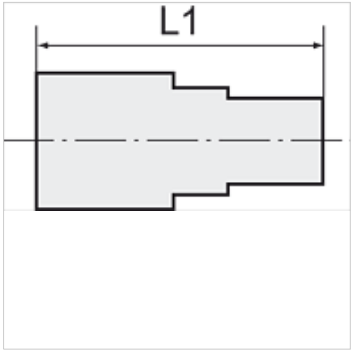

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikel

Aanduiding	Schroefdraad	voor uitw. slang-Ø	L1 (mm)	SW
K- 07 40 27 31	M 5	4 mm	20,5	Ø 9 mm
K- 07 40 27 32	M 5	6 mm	22,5	Ø 10,5 mm
K- 07 40 27 38	G 1/8	4 mm	20,0	9 mm
K- 07 40 27 39	G 1/8	6 mm	24,0	11 mm
K- 07 40 27 40	G 1/8	8 mm	26,5	13 mm
K- 07 40 27 35	G 1/4	4 mm	21,0	9 mm
K- 07 40 47 67	G 1/8	10 mm	29,0	16 mm
K- 07 40 27 36	G 1/4	6 mm	24,0	11 mm
K- 07 40 27 37	G 1/4	8 mm	25,0	13 mm
K- 07 40 27 34	G 1/4	10 mm	29,0	16 mm
K- 07 40 47 66	G 1/4	12 mm	31,5	18 mm
K- 07 40 27 42	G 3/8	8 mm	25,0	13 mm
K- 07 40 27 41	G 3/8	10 mm	29,5	16 mm
K- 07 40 47 68	G 3/8	12 mm	31,0	18 mm
K- 07 40 47 69	G 3/8	14 mm	34,0	21 mm
K- 07 40 27 33	G 1/2	10 mm	31,0	16 mm
K- 07 40 47 64	G 1/2	12 mm	31,5	18 mm
K- 07 40 47 65	G 1/2	14 mm	34,5	21 mm

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.