
K-L-STECK VB

Union elbows

Eigenschappen

Werkdruk	Max. 16 bar
Bedrijfstemperatuur	-20 °C to +150 °C
Materiaal	messing vernikkeld
Aandrukring	Nickel-plated brass
Spanring	Stainless steel



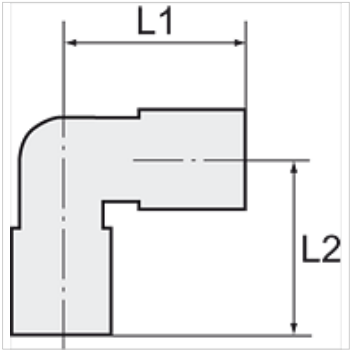

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikel

Aanduiding	voor uitw. slang-Ø	L1 (mm)	L2 (mm)
K- 07 40 27 53	4 mm	17,5	17,5
K- 07 40 27 54	6 mm	20,0	20,0
K- 07 40 27 55	8 mm	23,0	23,0
K- 07 40 27 56	10 mm	25,0	25,0
K- 07 40 47 79	12 mm	27,5	27,5
K- 07 40 47 80	14 mm	31,0	31,0

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.