# K-L-STECKVER DREH AG-K BESCH 1


Male elbows, swivel type, conical male thread, coated

HANSA-FLEX

## Eigenschappen

| | |
|---|---|
| **Werkdruk** | Max. 16 bar |
| **Bedrijfstemperatuur** | -20 °C to +150 °C |
| **Materiaal** | messing vernikkeld |
| **Aandrukring** | Nickel-plated brass |
| **Spanring** | Stainless steel |



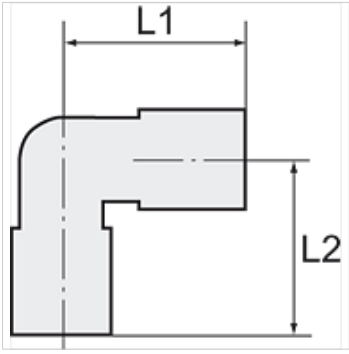


## Aanwijzing

Andere gegevens op aanvraag.

## Beschrijving

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.<br>All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Artikel

| Aanduiding | Schroefdraad | voor uitw. slang-Ø | L1 (mm) | L2 (mm) | SW |
|---|---|---|---|---|---|
| **K- 07 40 28 10** | R 1/8 | 4 mm | 20,0 | 20,0 | 13 mm |
| **K- 07 40 28 11** | R 1/8 | 6 mm | 21,0 | 20,0 | 13 mm |
| **K- 07 40 28 12** | R 1/8 | 8 mm | 24,0 | 20,0 | 13 mm |
| **K- 07 40 28 07** | R 1/4 | 4 mm | 20,0 | 25,0 | 14 mm |
| **K- 07 40 28 08** | R 1/4 | 6 mm | 21,0 | 25,0 | 14 mm |
| **K- 07 40 28 09** | R 1/4 | 8 mm | 24,0 | 25,0 | 14 mm |
| **K- 07 40 28 06** | R 1/4 | 10 mm | 27,0 | 26,0 | 16 mm |
| **K- 07 40 28 14** | R 3/8 | 8 mm | 24,0 | 28,0 | 18 mm |
| **K- 07 40 28 13** | R 3/8 | 10 mm | 27,0 | 30,0 | 18 mm |
| **K- 07 40 48 00** | R 3/8 | 12 mm | 29,0 | 32,5 | 20 mm |
| **K- 07 40 47 99** | R 1/2 | 12 mm | 29,0 | 35,5 | 22 mm |

*Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.*