
K-L-STECKVER SK AGR OR

Banjo elbows with outer hex, parallel male thread with O-ring

Eigenschappen

Werkdruk	Max. 16 bar
Bedrijfstemperatuur	-20 °C to +150 °C
Materiaal	messing vernikkeld
Aandrukring	Nickel-plated brass
O-ring	FKM (FPM)
Spanring	Stainless steel



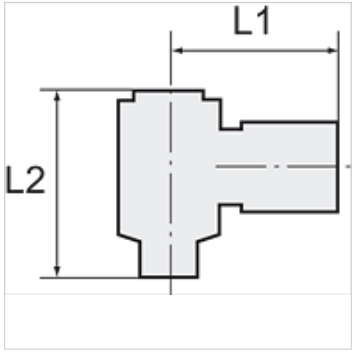

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Artikel

Aanduiding	Schroefdraad	voor uitw. slang-Ø	L1 (mm)	L2 (mm)	SW
K- 07 40 27 92	M 5	4 mm	18,0	17,5	8 mm
K- 07 40 27 93	M 5	5 mm	19,0	17,5	8 mm
K- 07 40 27 94	M 5	6 mm	19,5	19,5	8 mm
K- 07 40 27 98	G 1/8	4 mm	20,5	28,0	14 mm
K- 07 40 27 99	G 1/8	6 mm	23,0	28,0	14 mm
K- 07 40 28 00	G 1/8	8 mm	24,5	28,0	14 mm
K- 07 40 27 96	G 1/4	6 mm	24,0	33,0	17 mm
K- 07 40 27 97	G 1/4	8 mm	26,0	33,0	17 mm
K- 07 40 27 95	G 1/4	10 mm	27,0	33,0	17 mm
K- 07 40 28 02	G 3/8	8 mm	27,0	36,0	19 mm
K- 07 40 47 94	G 3/8	10 mm	28,0	36,0	19 mm
K- 07 40 28 01	G 3/8	12 mm	29,0	36,0	19 mm
K- 07 40 47 93	G 1/2	12 mm	34,5	42,0	24 mm

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.