



# K-DRV SCHLITZSCHR DREH BESCH

Unidirectional flow control valves with outgoing air restriction, adjustable, angled, swivel type, parallel male thread with O-ring

**HANSA FLEX**

## Eigenschappen

Werkdruk	Max. 10 bar
Toepassingsgebied	Air, vacuum
aanbevolen slangen	PU or PA (nylon)
Middelen	Compressed air and all gases or liquids that are compatible with the materials
Temperatuurgebied	-20 °C to +80 °C
Dichtvlak	Parallel version: O-ring in housing, Conical version: thread coating
Materiaal	Plastic, Nickel plated brass
Aandrukring	Plastic

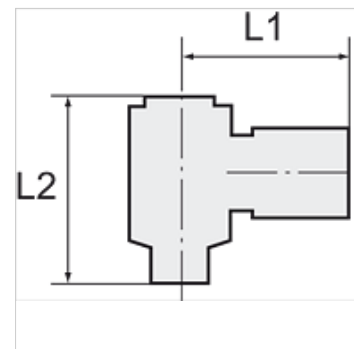

## Aanwijzing

Andere gegevens op aanvraag.

## Beschrijving

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Artikel

Aanduiding	Schroefdraad	voor uitw. slang-Ø	L1 (mm)	L2 min (mm)	SW
K- 07 40 46 33	M 5	4 mm	20,0	23,0	8 mm
K- 07 40 46 34	M 5	6 mm	21,5	23,0	8 mm
K- 07 40 46 42	G 1/8	4 mm	23,0	31,5	12 mm
K- 07 40 46 43	G 1/8	6 mm	23,0	31,5	12 mm
K- 07 40 46 44	G 1/8	8 mm	26,5	31,5	12 mm
K- 07 40 46 39	G 1/4	4 mm	25,0	38,3	14 mm
K- 07 40 46 40	G 1/4	6 mm	25,0	38,3	14 mm
K- 07 40 46 41	G 1/4	8 mm	29,0	38,3	14 mm
K- 07 40 46 38	G 1/4	10 mm	31,0	38,3	14 mm
K- 07 40 46 47	G 3/8	6 mm	27,0	43,0	19 mm
K- 07 40 46 48	G 3/8	8 mm	30,5	43,0	19 mm
K- 07 40 46 45	G 3/8	10 mm	32,0	43,0	19 mm
K- 07 40 46 46	G 3/8	12 mm	35,0	43,0	19 mm
K- 07 40 46 37	G 1/2	8 mm	33,0	49,0	24 mm
K- 07 40 46 35	G 1/2	10 mm	34,5	49,0	24 mm
K- 07 40 46 36	G 1/2	12 mm	36,5	49,0	24 mm