
K-STECKVERBINDU RED 1

Reducers

Eigenschappen

Werkdruk	Max. 16 bar
Bedrijfstemperatuur	-20 °C to +80 °C
Materiaal	messing vernikkeld
Aandrukring	Hostaform
Spanring	Stainless steel



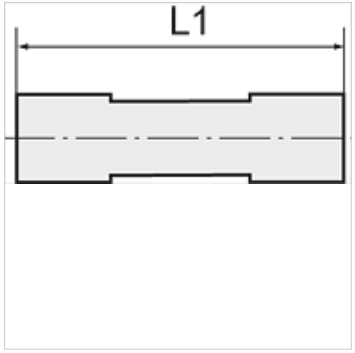

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Artikel

Aanduiding	Schroefdraad	voor uitw. slang-Ø	L1 (mm)
K- 07 40 25 26	M 13 x 1	4 mm / 6 mm	32,7
K- 07 40 25 27	M 15 x 1	4 mm / 8 mm	34,4
K- 07 40 25 28	M 15 x 1	6 mm / 8 mm	35,0
K- 07 40 25 29	M 17 x 1	6 mm / 10 mm	37,5
K- 07 40 25 30	M 20 x 1	6 mm / 12 mm	39,0
K- 07 40 25 31	M 17 x 1	8 mm / 10 mm	37,8
K- 07 40 25 32	M 20 x 1	8 mm / 12 mm	40,1
K- 07 40 25 33	M 20 x 1	10 mm / 12 mm	40,8

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.