


# TR HL

Inslagnippel, CEL

## Eigenschappen

|                             |                                   |
|-----------------------------|-----------------------------------|
| <b>Aansluiting 1</b>        | Metrische buitendraad cilindrisch |
| <b>Afdichtingsvorm 1</b>    | 24° binnenconus                   |
| <b>Norm</b>                 | ISO 8434-1                        |
| <b>Materiaal</b>            | Staal                             |
| <b>Oppervlakbescherming</b> | Galvanisch gecoat                 |

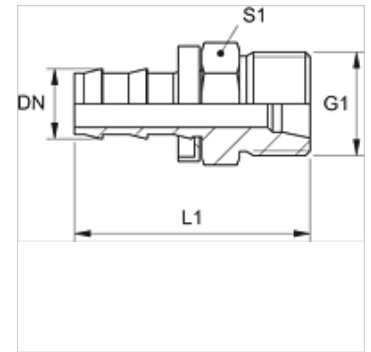

## Artikel

| Aanduiding  | DN | Size | Duim  | voor uitw. buis-Ø<br>(mm) | G1         | L1<br>(mm) |
|-------------|----|------|-------|---------------------------|------------|------------|
| TR 04 HL    | 5  | 3    | 3/16" | 6                         | M 12 x 1,5 | 30         |
| TR 06 HL    | 6  | 4    | 1/4"  | 8                         | M 14 x 1,5 | 31         |
| TR 08 HL 06 | 8  | 5    | 5/16" | 8                         | M 14 x 1,5 | 38         |
| TR 08 HL    | 8  | 5    | 5/16" | 10                        | M 16 x 1,5 | 38         |
| TR 10 HL 08 | 10 | 6    | 3/8"  | 10                        | M 16 x 1,5 | 38         |
| TR 10 HL    | 10 | 6    | 3/8"  | 12                        | M 18 x 1,5 | 39         |
| TR 13 HL    | 12 | 8    | 1/2"  | 15                        | M 22 x 1,5 | 52         |