


K-FI VOR HANSA PRO

Compressed air prefilter, with manual/semi-automatic condensate drain, HANSA PRO

HANSA FLEX

Eigenschappen

| | |
|----------------------------|--|
| Mediumtemperatuur | -10 °C to +50 °C |
| Omgevingstemperatuur | -10 °C to +50 °C |
| Middelen | Perslucht |
| Constructie | fiber filter |
| Bevestigingsmethode | Line mounting, mounting kit or wall mounting |
| Inbouwpositie | Vertical, drain down |
| Filterfijnheid | 0,30 µm |
| Filterrendement | 99.999 % |
| max. condensaathoeveelheid | 49 cc |
| Nominaal debiet G 1/2 | 580 l/min (P1 = 6 bar/Delta P = 0,02 bar) |
| Nominaal debiet G 3/8 | 580 l/min (P1 = 6 bar/Delta P = 0,02 bar) |
| Pe max | 16 bar |
| Filterelement | Paper-AI |
| Behuizing | PA66 |
| Restoliegehalte | 0,01 mg/m3 |

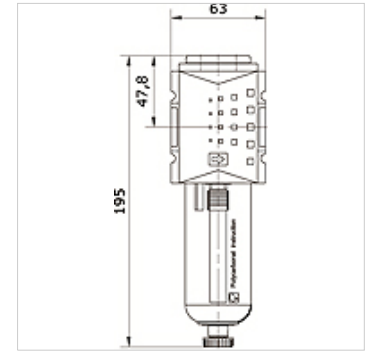

Artikel

| Aanduiding | Aansluiting | Container | Maat | Condensaatafvoer |
|----------------|-------------|------------------------------------|------|-------------------------|
| K- 07 25 21 24 | G 3/8 i | polycarbonate with protective cage | 2 | manual / semi-automatic |
| K- 07 25 21 25 | G 1/2 i | polycarbonate with protective cage | 2 | manual / semi-automatic |
| K- 07 25 21 26 | G 3/8 i | zinc with visual display | 2 | manual / semi-automatic |
| K- 07 25 21 27 | G 1/2 i | zinc with visual display | 2 | manual / semi-automatic |