


K-VERTEILER 4-FACH HANSA PRO

Distributor 4-fold, HANSA PRO

HANSA FLEX

Eigenschappen

| | |
|--------------------------------|--|
| Mediumtemperatuur | -10 °C to +50 °C |
| Omgevingstemperatuur | -10 °C to +50 °C |
| Middelen | Perslucht |
| Bevestigingsmethode | Line mounting, mounting kit or wall mounting |
| Inbouwpositie | Any |
| Nominaal debiet G 1/2 | 11.000 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Nominaal debiet G 3/8 | 7.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Nominaal debiet achter (P - E) | 2.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Nominaal debiet boven (P - D) | 2.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Nominaal debiet onder (P - B) | 5.500 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Nominaal debiet voor (P - C) | 2.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| PE max 11 | 16 bar |
| Behuizing | PA66 |

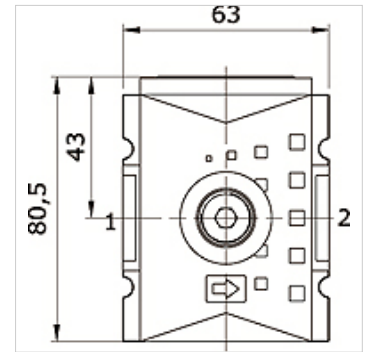

Artikel

| Aanduiding | Aansluiting P + A | Aansluiting B | Aansluiting C | Aansluiting D | Aansluiting E | Maat |
|----------------|-------------------|---------------|---------------|---------------|---------------|------|
| K- 07 25 22 46 | G 3/8 i | G 1/2 i | G 3/8 i | G 1/4 i | G 3/8 i | 2 |
| K- 07 25 22 47 | G 1/2 i | G 1/2 i | G 3/8 i | G 1/4 i | G 3/8 i | 2 |