


# K-VERTEILER 4-FACH HANSA PRO

Distributor 4-fold, HANSA PRO

**HANSA FLEX**

## Eigenschappen

Mediumtemperatuur	-10 °C to +50 °C
Omgevingstemperatuur	-10 °C to +50 °C
Middelen	Perslucht
Bevestigingsmethode	Line mounting, mounting kit or wall mounting
Inbouwpositie	Any
Nominaal debiet G 1/2	11.000 l/min (P1 = 6 bar/Delta P = 1 bar)
Nominaal debiet G 3/8	7.250 l/min (P1 = 6 bar/Delta P = 1 bar)
Nominaal debiet achter (P - E)	2.250 l/min (P1 = 6 bar/Delta P = 1 bar)
Nominaal debiet boven (P - D)	2.250 l/min (P1 = 6 bar/Delta P = 1 bar)
Nominaal debiet onder (P - B)	5.500 l/min (P1 = 6 bar/Delta P = 1 bar)
Nominaal debiet voor (P - C)	2.250 l/min (P1 = 6 bar/Delta P = 1 bar)
PE max 11	16 bar
Behuizing	PA66

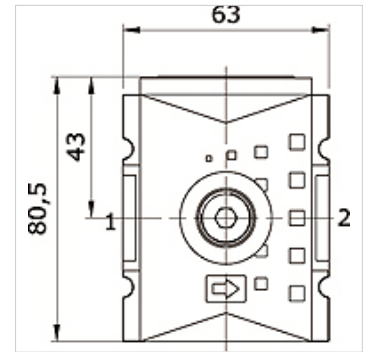

## Artikel

Aanduiding	Aansluiting P + A	Aansluiting B	Aansluiting C	Aansluiting D	Aansluiting E	Maat
K- 07 25 22 46	G 3/8 i	G 1/2 i	G 3/8 i	G 1/4 i	G 3/8 i	2
K- 07 25 22 47	G 1/2 i	G 1/2 i	G 3/8 i	G 1/4 i	G 3/8 i	2