


## Eigenschappen

|                             |                             |
|-----------------------------|-----------------------------|
| <b>Aansluiting 1</b>        | BSP-buitendraad cilindrisch |
| <b>Afdichtingsvorm 1</b>    | 60° binnenconus             |
| <b>Afkorting</b>            | AGR                         |
| <b>Norm</b>                 | ISO 8434-6<br>BS 5200       |
| <b>Leveromvang</b>          | Persnippel + persfitting    |
| <b>Materiaal</b>            | Staal                       |
| <b>Oppervlakbescherming</b> | Galvanisch gecoat           |

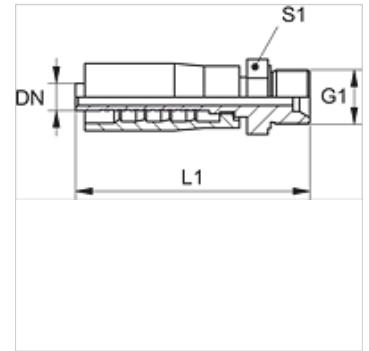

## Artikel

| Aanduiding    | DN | Size | Duim | G1     | L1<br>(mm) | S1 |
|---------------|----|------|------|--------|------------|----|
| PAY 506 HB    | 6  | 4    | 1/4" | G 1/4" | 62,6       | 19 |
| PAY 506 HB 10 | 6  | 4    | 1/4" | G 3/8" | 65,0       | 22 |
| PAY 510 HB    | 10 | 6    | 3/8" | G 3/8" | 72,0       | 22 |
| PAY 513 HB    | 12 | 8    | 1/2" | G 1/2" | 82,0       | 27 |
| PAY 520 HB    | 19 | 12   | 3/4" | G 3/4" | 96,2       | 32 |
| PAY 525 HB    | 25 | 16   | 1"   | G 1"   | 104,5      | 41 |