



# HK CAGEN

Pierścień do łożyska przegubowego

**HANSA FLEX**

## Właściwości

**Materiał** stal S355J0 (Fe510C)

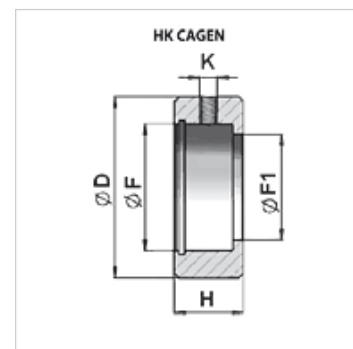

## Artykuł

| Oznaczenie          | H<br>(mm) | K  | Ø D<br>(mm) | Ø F<br>(mm) | Ø F1<br>(mm) | Ciężar<br>(kg) |
|---------------------|-----------|----|-------------|-------------|--------------|----------------|
| HK CAGEN 040 150 15 | 15        | M6 | 40          | 26          | 22           | 0,09           |
| HK CAGEN 050 190 20 | 19        | M6 | 50          | 35          | 29           | 0,15           |
| HK CAGEN 060 230 25 | 23        | M6 | 60          | 42          | 35           | 0,26           |
| HK CAGEN 070 280 30 | 28        | M6 | 70          | 47          | 40           | 0,47           |
| HK CAGEN 085 300 35 | 30        | M6 | 85          | 55          | 47           | 0,79           |
| HK CAGEN 095 350 40 | 35        | M8 | 95          | 62          | 53           | 1,14           |
| HK CAGEN 110 400 45 | 40        | M8 | 110         | 68          | 60           | 1,87           |
| HK CAGEN 120 400 50 | 40        | M8 | 120         | 75          | 66           | 2,18           |
| HK CAGEN 138 500 60 | 50        | M8 | 138         | 90          | 80           | 3,40           |