

OR F-S


O-ring, FEP/silikon

HANSA FLEX

Właściwości

Typ konstrukcji o-ring

Materiał FEP / silikon

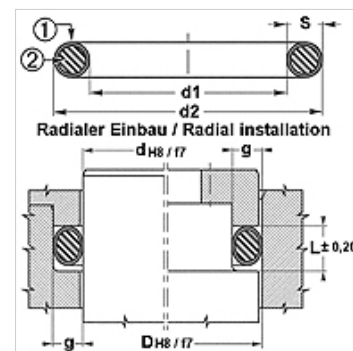

Artykuł

Oznaczenie	d1 (mm)	d2 (mm)	s (mm)
OR 24.99-3.53 F-S	24,99	32,05	3,53
OR 47.22-3.53 F-S	47,22	54,28	3,53
OR 55.56-3.53 F-S	55,56	62,62	3,53