


K-SCHL-AUFROLLER LUFT H

Hose reels for compressed air, high flow capacity

HANSA FLEX

Właściwości

| | |
|----------------------------|----------------------|
| Materiał węża | Braided polyurethane |
| Ciśnienie robocze | maks. 12 bar |
| Temperatura robocza | -20 °C to +60 °C |
| kąt obrotu | 300° |

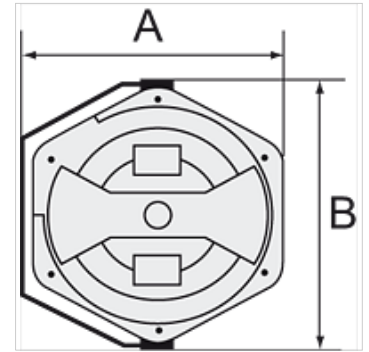

Wskazówka

Dalsze informacje na zapytanie.

Opis

Specially designed to ensure a high flow capacity. Easy mounting on the wall or ceiling. Closed, rugged, impact-resistant housing made of POM, supply/outlet R 1/4 male thread and lightweight, hard-wearing, oil-resistant polyurethane hose. Incl. 2 m feeder hose.

Artykuł

| Oznaczenie | Wymiar węża | A (mm) | B (mm) | Długość węża (m) |
|----------------|---------------|-----------|-----------|---------------------|
| K- 07 10 06 14 | 16 mm x 11 mm | 394,5 | 436,0 | 10 |