

K-GRUNDEJEKTION SBP-C ELK

Basic ejector »SBP-C« with blow-off valve and electronic vacuum switch, with integrated silencer

Właściwości

Właściwości	Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%) Connection of compressed air and vacuum with push-in coupling Basic housing with connection facility for a vacuum switch Maximum suction capacity with minimum compressed air consumption Minimum size, low weight Various power ratings for optimised air consumption
Przeznaczenie	For universal use in handling systems with very high dynamic movements Handling all kinds of air-tight components For use in separation systems where space is restricted. \nConstruction of ejector blocks for centralised or decentralised individual control of suction pads.
System dysz	Brass
Przyłącze	Push-in coupling
tłumik	Plastic
Korpus	Impact-resistant plastic

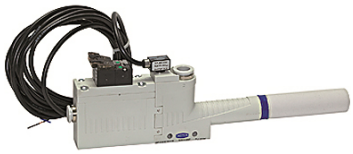

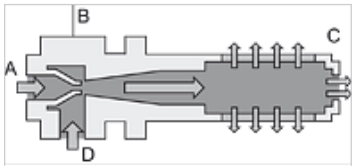

Wskazówka

Dalsze informacje na zapytanie.

Opis

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Artykuł

Oznaczenie	Wielkość dyszy	zawór ssący położenie spoczynkowe	Przyłącze sprężonego powietrza	przyłącze próżni	Wymiar
K- 07 45 01 20	1,0	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 22	1,5	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 24	2,0	NO	8 mm	10 mm	228mm x 20mm x 72mm
K- 07 45 01 26	2,5	NO	8 mm	10 mm	228mm x 20mm x 72mm

Akcesoria

K-ERSATZSCHALLDAEMPFER 1	Replacement silencers
K-GRUNDPLATTEN 1	Base plate
K-BEFESTIGUNGSSAETZE 1	Mounting kit

Mimo starannego sprawdzenia nie możemy wykluczyć błędów i nie gwarantujemy prawidłowości podanych informacji.