K-KOMPAKTEJEKTOREN MINI


Mini-compact ejectors

HANSA FLEX

Właściwości

Właściwości	Vacuum generator with integrated control valves and system monitoring functions Gripping and blowing off can be controlled without the need for external valves Optimised air consumption thanks to many models with differing suction capacities Minimum energy costs in continuous operation Easy adjustment with foil keypad, LED display of the settings Minimum size and low weight Optimum vacuum generation directly on the suction pad Complete solution for very simple installation Short learning curve thanks to "teach" function No need for additional sensors Easily visible status indication
Przeznaczenie	Ideal where space is restricted and for highly dynamic movements, handling with industrial robots, linear axes pick-and-place systems
Stopień opróżnienia	85 %
Korpus	Anodised aluminium
Zintegrowany	NC blow-off valve, filter, silencer, non-return valve



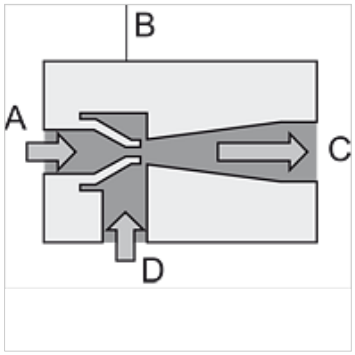

Wskazówka

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. Dalsze informacje na zapytanie.

Opis

Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Dodatkowe informacje

Important: Order two connection plugs per ejector.

Artykuł

Oznaczenie	Wielkość dyszy	zawór ssący położenie spoczynkowe	Przyłącze sprężonego powietrza	przyłącze próżni	Zużycie powietrza ssanie (L/min)	maks. szybkość pompowania (L/min)	Wymiar	Ciśnienie robocze (bar)
K- 07 45 01 46	1,0	NC	M 5 IG	M5 female	46,0	23,0	65mm x 10mm x 107mm	4,5
K- 07 45 01 45	1,0	NO	M 5 IG	M5 female	46,0	23,0	65mm x 10mm x 107mm	4,5

Akcesoria

K-ANSCHLUSSSTECK MAGNETVE 1	Connection plug for solenoid valves
K-ERSATZSCHALLDAEMPFER	Replacement silencers
K-ERSATZFILTERELEMENTE 1	Replacement filter element

Mimo starannego sprawdzenia nie możemy wykluczyć błędów i nie gwarantujemy prawidłowości podanych informacji.