
K-SAUGPLATTENAUFHAENGUNG


Flexible suction pad mountings

HANSA FLEX

Właściwości

Przeznaczenie	For handling of workpieces with sloping using large-area vacuum gripper Handling of large plates that can sag when lifting In combination with spring plungers to compensate height-differences and Uneveness
Cechy szczególne	very good adaptation to oblique workpiece surfaces automatic Rückstellung in die Ausgangslage vacuum-tight design with integrated protection against damage

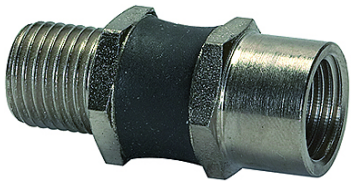

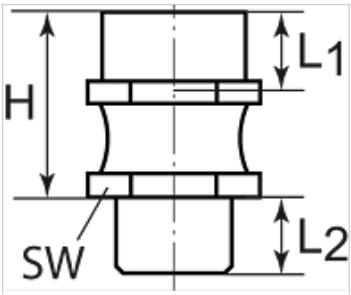

Wskazówka

Dalsze informacje na zapytanie.

Opis

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

Artykuł

Oznaczenie	Gwint 1 wewnętrzny	Gwint 2 zewnętrzny	H (mm)	Materiał	L1 (mm)	L2 (mm)	kąt W (°)	Obciążenie pionowe (N/m2)	Moment zginający (N/m2)	SW (mm)
K- 07 45 01 47	G 1/4	M 10 x 1.25	27,0	Steel, rubber	10,5	8,0	12	500	8,0	17
K- 07 45 01 48	G 1/4	G 1/4	27,0	Steel, rubber	12,0	12,0	12	750	10,0	17

Mimo starannego sprawdzenia nie możemy wykluczyć błędów i nie gwarantujemy prawidłowości podanych informacji.