


# K-MUFFEN ABSPERRVENTIL MS

Female thread globe valves

**HANSA FLEX**

## Właściwości

<b>Ciśnienie robocze</b>	maks. 10 bar
<b>Zastosowanie</b>	Non-corrosive liquids and steam up to +90 °C
<b>obudowa, górna część</b>	Brass
<b>uszczelka</b>	NBR

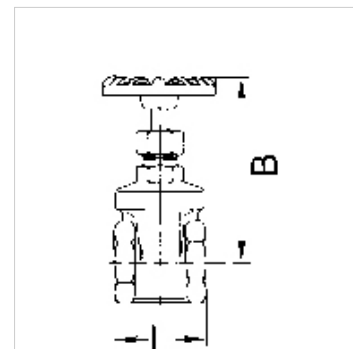

## Wskazówka

Dalsze informacje na zapytanie.

## Artykuł

Oznaczenie	DN	Gwint	B (mm)	L (mm)
K- 07 30 22 23	15	G 1/2	78,0	54,0
K- 07 30 22 24	20	G 3/4	78,0	54,5
K- 07 30 22 25	25	G 1	82,0	61,0
K- 07 30 22 26	32	G 1 1/4	126,0	88,5
K- 07 30 22 27	40	G 1 1/2	128,0	101,0
K- 07 30 22 28	50	G 2	149,0	117,0