


# K-SSV BR

Angle-seat valves with piston actuator

**HANSA FLEX**

## Właściwości

ciśnienie różnicowe	0 - 16 bar
Temperatura czynnika	-10 °C to +180 °C
przyłącze powietrza sterującego	G 1/8
temperatura czynnika sterującego	max. +60 °C
temperatura otoczenia	-20 °C to +70 °C
dozwolone ciśnienie statyczne	Max. 16 bar
obudowa zaworu	Bronze
łącznik	Stainless steel
głowica sterująca	Polyamide (glass fibre-reinforced)
tłok	Nickel-plated brass (DN 15 to DN 32), PBT + GF 30% (DN 40 to DN 50)
wrzeciono	Stainless steel
Materiał uszczelniający	PTFE

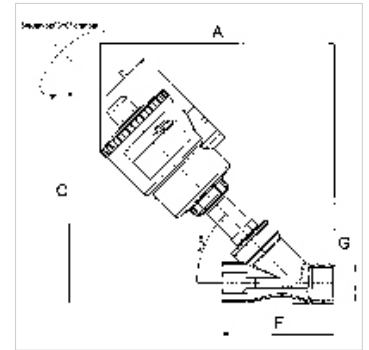

## Wskazówka

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

Dalsze informacje na zapytanie.

## Opis

Angle-seat valves with external pilot control and a self-aligning valve disc for neutral (bronze body) or corrosive (stainless steel body) media. Very high flow due to angled seat design, Water hammer prevented by fluid entry under the disc, Suitable for vacuum operation (low vacuum), NAMUR interface on the piston actuator. 3/2 and 5/2-way valves can be mounted directly.

## Dodatkowe informacje

Other versions e.g. for steam on request

Information on max. operating differential pressures apply for air, gas, corrosive aggressive media, water

## Artykuł

Oznaczenie	A (mm)	C (mm)	F (mm)	Gwint	maks. różnica ciśnienia roboczego (bar)	min. ciśnienie sterujące	maks. ciśnienie sterujące
K- 07 30 25 24	163,0	153,0	65,0	G 1/2	16	4	10
K- 07 30 25 25	173,0	163,0	75,0	G 3/4	10	4	10
K- 07 30 25 26	191,0	181,0	75,0	G 3/4	16	4	10
K- 07 30 25 27	206,0	196,0	90,0	G 1	11	4	10
K- 07 30 25 28	246,0	236,0	90,0	G 1	16	4	8
K- 07 30 25 29	255,0	245,0	110,0	G 1 1/4	14	4	8
K- 07 30 25 30	270,0	264,0	120,0	G 1 1/2	11	4	8
K- 07 30 25 31	306,0	300,0	120,0	G 1 1/2	16	4	8
K- 07 30 25 32	316,0	311,0	150,0	G 2	10	4	8