


# K-SSV BR

Angle-seat valves with piston actuator

**HANSA FLEX**

## Właściwości

|                                  |   |
|----------------------------------|---|
| ciśnienie różnicowe              | 0 - 16 bar  |
| Temperatura czynnika             | -10 °C to +180 °C   |
| przyłącze powietrza sterującego  | G 1/8   |
| temperatura czynnika sterującego | max. +60 °C   |
| temperatura otoczenia            | -20 °C to +70 °C  |
| dozwolone ciśnienie statyczne    | Max. 16 bar   |
| obudowa zaworu                   | Bronze  |
| łącznik                          | Stainless steel   |
| głowica sterująca                | Polyamide (glass fibre-reinforced)                                  |
| łtók                             | Nickel-plated brass (DN 15 to DN 32), PBT + GF 30% (DN 40 to DN 50) |
| wrzeciono                        | Stainless steel   |
| Materiał uszczelniający          | PTFE  |

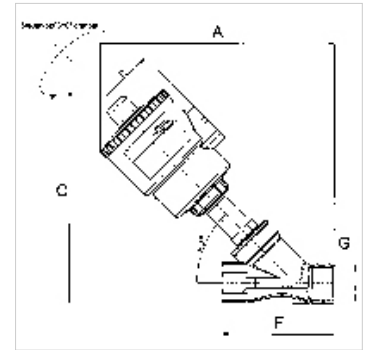

## Wskazówka

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

Dalsze informacje na zapytanie.

## Opis

Angle-seat valves with external pilot control and a self-aligning valve disc for neutral (bronze body) or corrosive (stainless steel body) media. Very high flow due to angled seat design, Water hammer prevented by fluid entry under the disc, Suitable for vacuum operation (low vacuum), NAMUR interface on the piston actuator. 3/2 and 5/2-way valves can be mounted directly.

## Dodatkowe informacje

Other versions e.g. for steam on request

Information on max. operating differential pressures apply for air, gas, corrosive aggressive media, water

## Artykuł

| Oznaczenie     | A<br>(mm) | C<br>(mm) | F<br>(mm) | Gwint   | maks. różnica ciśnienia roboczego<br>(bar) | min. ciśnienie sterujące | maks. ciśnienie sterujące |
|----------------|-----------|-----------|-----------|---------|--|--------------------------|---------------------------|
| K- 07 30 25 24 | 163,0     | 153,0     | 65,0      | G 1/2   | 16   | 4                        | 10                        |
| K- 07 30 25 25 | 173,0     | 163,0     | 75,0      | G 3/4   | 10   | 4                        | 10                        |
| K- 07 30 25 26 | 191,0     | 181,0     | 75,0      | G 3/4   | 16   | 4                        | 10                        |
| K- 07 30 25 27 | 206,0     | 196,0     | 90,0      | G 1     | 11   | 4                        | 10                        |
| K- 07 30 25 28 | 246,0     | 236,0     | 90,0      | G 1     | 16   | 4                        | 8                         |
| K- 07 30 25 29 | 255,0     | 245,0     | 110,0     | G 1 1/4 | 14   | 4                        | 8                         |
| K- 07 30 25 30 | 270,0     | 264,0     | 120,0     | G 1 1/2 | 11   | 4                        | 8                         |
| K- 07 30 25 31 | 306,0     | 300,0     | 120,0     | G 1 1/2 | 16   | 4                        | 8                         |
| K- 07 30 25 32 | 316,0     | 311,0     | 150,0     | G 2     | 10   | 4                        | 8                         |