


# K-SCHALLDAEMPFER VA

Stainless steel silencers

**HANSA FLEX**

## Właściwości

<b>Ciśnienie robocze</b>	maks. 8 bar
<b>Temperatura robocza</b>	-10 °C to +250 °C
<b>Norma</b>	G thread acc. to DIN EN ISO 228-1
<b>Materiał</b>	stal szlachetna 1.4401

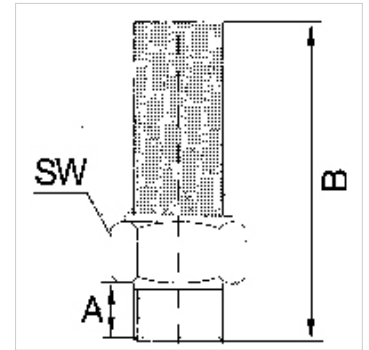

## Wskazówka

Dalsze informacje na zapytanie.

## Artykuł

Oznaczenie	Gwint	A (mm)	B (mm)	RK
K- 07 40 13 07	M 5	5,0	21,0	9 mm
K- 07 40 13 08	G 1/8	7,0	29,0	12 mm
K- 07 40 13 09	G 1/4	9,0	33,0	15 mm
K- 07 40 13 10	G 3/8	9,0	39,0	19 mm
K- 07 40 13 11	G 1/2	9,5	48,0	23 mm
K- 07 40 46 82	G 3/4	11,0	58,0	30 mm
K- 07 40 46 83	G 1	15,0	71,0	36 mm