



K-XVM ZYL 2

Male connectors, parallel male thread

HANSA FLEX

Właściwości

maks. ciśnienie robocze	18 bar
dopuszczalne węże	PA, PE, PU
Materiał	mosiądz nikielowany

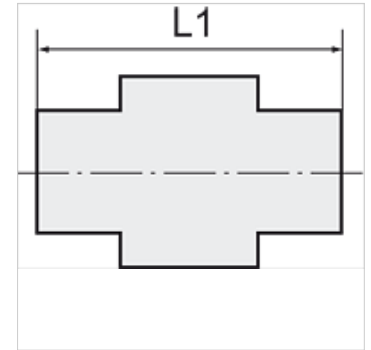

Wskazówka

Dalsze informacje na zapytanie.

Artykuł

Oznaczenie	Gwint	dla węża	L1 (mm)	RK
K- 07 40 33 54	M 5	5 mm / 3 mm	21,0	8 mm
K- 07 40 33 55	M 5	6 mm / 4 mm	21,0	8 mm
K- 07 40 33 60	G 1/8	5 mm / 3 mm	23,0	14 mm
K- 07 40 33 61	G 1/8	6 mm / 4 mm	25,5	13 mm
K- 07 40 33 62	G 1/8	8 mm / 6 mm	25,5	14 mm
K- 07 40 33 59	G 1/8	10 mm / 8 mm	27,5	14 mm
K- 07 40 33 57	G 1/4	6 mm / 4 mm	28,0	16 mm
K- 07 40 33 58	G 1/4	8 mm / 6 mm	28,0	16 mm
K- 07 40 33 56	G 1/4	10 mm / 8 mm	29,5	16 mm
K- 07 40 33 65	G 3/8	6 mm / 4 mm	29,0	19 mm
K- 07 40 33 66	G 3/8	8 mm / 6 mm	29,0	19 mm
K- 07 40 33 63	G 3/8	10 mm / 8 mm	30,5	19 mm
K- 07 40 33 64	G 3/8	12 mm / 10 mm	32,0	19 mm