



# K-GAM IG 4

Female connectors, female thread

**HANSA FLEX**

## Właściwości

maks. ciśnienie robocze	18 bar
dopuszczalne węże	PA, PE, PU
Materiał	mosiądz nikielowany

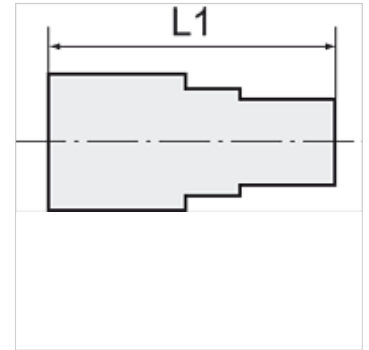

## Wskazówka

Dalsze informacje na zapytanie.

## Artykuł

Oznaczenie	Gwint	dla węża	L1 (mm)	RK
K- 07 40 33 77	G 1/8	6 mm / 4 mm	25,0	14 mm
K- 07 40 33 78	G 1/8	8 mm / 6 mm	25,0	14 mm
K- 07 40 33 75	G 1/4	6 mm / 4 mm	29,0	17 mm
K- 07 40 33 76	G 1/4	8 mm / 6 mm	29,0	17 mm
K- 07 40 33 74	G 1/4	10 mm / 8 mm	30,5	17 mm
K- 07 40 33 73	G 1/2	8 mm / 6 mm	33,0	24 mm
K- 07 40 33 72	G 1/2	10 mm / 8 mm	34,5	24 mm
K- 07 40 33 80	G 3/8	6 mm / 4 mm	29,5	20 mm
K- 07 40 33 81	G 3/8	8 mm / 6 mm	29,5	20 mm
K- 07 40 33 79	G 3/8	10 mm / 8 mm	31,0	20 mm