


K-W90 AG-K O OR

Male elbows, conical male thread (without O-ring)

HANSA FLEX

Właściwości

maks. ciśnienie robocze	18 bar
dopuszczalne węże	PA, PE, PU
Materiał	mosiądz nikielowany

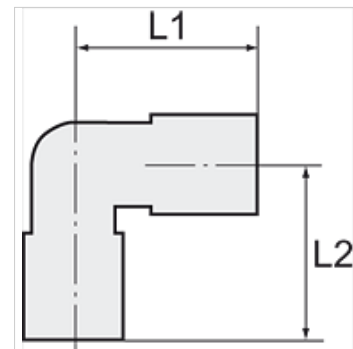

Wskazówka

Dalsze informacje na zapytanie.

Artykuł

Oznaczenie	Gwint	dla węża	L1 (mm)	L2 (mm)	RK
K- 07 40 33 88	R 1/8	6 mm / 4 mm	22,5	17,0	8 mm
K- 07 40 33 89	R 1/8	8 mm / 6 mm	22,5	17,0	10 mm
K- 07 40 33 87	R 1/8	10 mm / 8 mm	25,5	18,5	11 mm
K- 07 40 33 85	R 1/4	6 mm / 4 mm	22,5	20,0	10 mm
K- 07 40 33 86	R 1/4	8 mm / 6 mm	22,5	20,0	10 mm
K- 07 40 33 84	R 1/4	10 mm / 8 mm	25,5	21,5	11 mm
K- 07 40 33 92	R 3/8	6 mm / 4 mm	23,5	22,5	11 mm
K- 07 40 33 93	R 3/8	8 mm / 6 mm	24,0	22,5	11 mm
K- 07 40 33 90	R 3/8	10 mm / 8 mm	25,5	22,5	11 mm
K- 07 40 33 91	R 3/8	12 mm / 10 mm	30,0	24,5	14 mm