

K-W90 VERSCHR AG-K ISO 7-1 POM BLAU



Union elbows, rigid, conical male thread acc. to ISO 7-1

HANSA FLEX

Właściwości

Ciśnienie robocze 0 - 10 bar

Zakres temperatury -10 °C to +60 °C

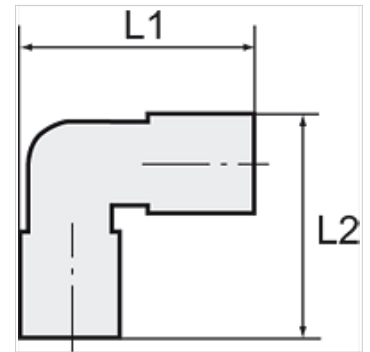

Wskazówka

Dalsze informacje na zapytanie.

Artykuł

| Oznaczenie | Gwint | dla węży | L1 (mm) | L2 (mm) |
|----------------|-------|--------------|------------|------------|
| K- 07 40 33 28 | R 1/8 | 6 mm / 4 mm | 23,0 | 16,0 |
| K- 07 40 33 29 | R 1/8 | 8 mm / 6 mm | 23,0 | 17,0 |
| K- 07 40 33 30 | R 1/4 | 6 mm / 4 mm | 24,0 | 19,0 |
| K- 07 40 33 31 | R 1/4 | 8 mm / 6 mm | 25,0 | 20,0 |
| K- 07 40 33 32 | R 1/4 | 12 mm / 9 mm | 28,0 | 23,0 |
| K- 07 40 33 33 | R 3/8 | 12 mm / 9 mm | 28,0 | 23,0 |