


K-PROP REGELVE SENTRONIC D

Proportional control valves, digital, 24 VDC

HANSA FLEX

Właściwości

| | |
|----------------------------|--|
| Temperatura czynnika | 0 - 60 °C |
| temperatura otoczenia | 0 - 50 °C |
| Czynniki robocze | Air or neutral gases ($\leq 50 \mu\text{m}$ filter specified) |
| Zakres ciśnienia | 0 - 10 bar |
| Wysterowanie | 0 to 10 V (on request: 0 to 20 mA or 4 to 20 mA) |
| wartość zadana elektryczna | 0 - 10 V |
| wyjście analogowe | 0 - 10 V |
| napęd | Proportional solenoid valve |
| wyjście cyfrowe | Pressure switch output PNP +/- 5% |
| ustawienie Failsafe | Pressure relieved in case of loss of voltage |
| części wewnętrzne | POM |
| Materiał uszczelniający | NBR |
| Obudowa | Aluminium |

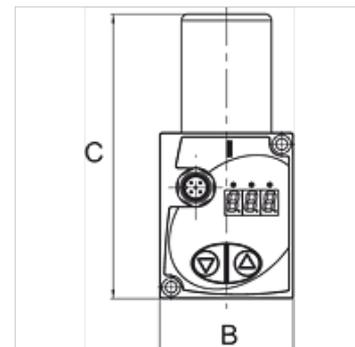

Wskazówka

Dalsze informacje na zapytanie.

Opis

Ever increasing requirements with regard to quality, precision, productivity, convenience, user friendliness and service represent tough challenges for industrial plant and production facilities. These challenges can only be mastered if physical quantities such as temperature, pressure, force, speed, torque, etc. are optimally adapted to the operating conditions of each installation. Stepless adjustment of these parameters is vital.

Proportional valves allow the medium to be varied as a function of an electronic input variable. By linking these valves to the electronics, it is possible to improve their accuracy and broaden their range of applications. A pressure regulator, for instance, needs to be suitable for several pressure ranges without having to adjust the pressure manually. Proportional valves control the output pressure in a closed control loop proportionally to the selected setpoint signal. This output pressure, in other words, is continually compared with the specified setpoint and automatically adjusted according to actual parameter values.

Artykuł

| Oznaczenie | Przylącze | DN | Przepływ (L/min) | B | C (mm) |
|----------------|-----------|----|------------------|---------|--------|
| K- 07 25 10 04 | G 1/8 | 4 | 780 | 52,0 mm | 112,0 |
| K- 07 25 10 05 | G 1/4 | 4 | 780 | 52,0 mm | 112,0 |
| K- 07 25 10 06 | G 1/4 | 8 | 1750 | 66,0 mm | 138,0 |
| K- 07 25 10 07 | G 3/8 | 8 | 1750 | 66,0 mm | 138,0 |