


K-WTEH 3-TLG PC SCHU H ABL STANDARD

Service units with polycarbonate bowl, bowl guard and semi-automatic drain valve

HANSA FLEX

Właściwości

| | |
|---|---|
| Ciśnienie wejściowe | Max. 16 bar (polycarbonate bowl / bowl guard), Max. 25 bar (metal bowl) |
| Zakres regulacji | 0.5 to 10 bar (polycarbonate bowl / bowl guard) 0.5 to 16 bar (metal bowl) |
| Temperatura czynnika | max. 60 °C |
| temperatura otoczenia | Max. 60 °C |
| wielkość porów w elemencie filtrującym | 5 µm (G 1/4 / G 3/8 / G 1/2), 40 µm (G 3/8 / G 3/4 / G 1 / G 1 1/4 / G 1 1/2) |
| Materiał uszczelniający | NBR |
| Obudowa | Die-cast zinc / Aluminium, painted silver |
| nasadka ociekowa | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl) |
| pomiar wartości przepływu | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Dalsze informacje | User manual on request |

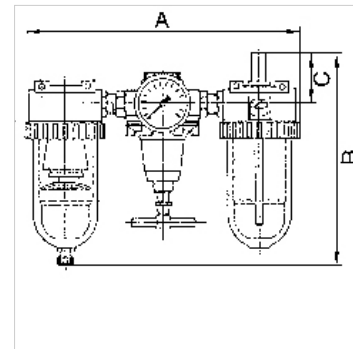

Opis

Three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, centrifugal separator and proportional lubricator.

Artykuł

| Oznaczenie | Gwint | Przepływ (L/min) | A (mm) | B | C (mm) | DN | Ø manometr |
|----------------|---------|------------------|--------|----------|--------|----|------------|
| K- 07 25 14 51 | G 1/4 | 600 | 172,0 | 182,6 mm | 51,0 | 6 | 50 |
| K- 07 25 14 58 | G 3/8 | 600 | 185,0 | 182,6 mm | 51,0 | 6 | 50 |
| K- 07 25 14 61 | G 3/8 | 1400 | 232,0 | 196,7 mm | 51,0 | 6 | 50 |
| K- 07 25 14 64 | G 1/2 | 3200 | 259,0 | 223,4 mm | 55,0 | 15 | 63 |
| K- 07 25 14 67 | G 3/4 | 3200 | 302,0 | 227,9 mm | 58,0 | 20 | 63 |
| K- 07 25 14 70 | G 1 | 3200 | 302,0 | 227,9 mm | 58,0 | 25 | 63 |
| K- 07 25 14 73 | G 1 1/4 | 5000 | 395,0 | 313,4 mm | 70,0 | 25 | 63 |
| K- 07 25 14 76 | G 1 1/2 | 5000 | 395,0 | 313,4 mm | 70,0 | 35 | 63 |

Części zamienne

| | |
|----------------------------|---|
| K-HALTERBAUSATZ STANDARD | Holder |
| K-SCHUTZKORB G | Protective cage |
| K-VERSCHLEI-SATZ | Set of wearing parts |
| K-FILTERELEMENT | Filter element |
| K-TROPFAUFSATZ POLYCARBO | Drip attachment polycarbonate |
| K-LOESBARE DOPPELNIPPEL MS | Double nipples |
| K-XV AGM MS NI | Double nipples, parallel male thread, nickel-plated brass |
| K-RD NIPPEL MS NI | Reducing nipples - nickel-plated brass |
| K-TROPFAUFSATZ METALL | Drip attachment metal |
| K-ABLASSVENTIL AUTO | Fully-automatic drain valve with Adapter G 1/8 |
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |