


# K-KOLST LOSE ZYL

Rodless cylinders

**HANSA FLEX**

## Właściwości

<b>Czynniki robocze</b>	Filtered (50 µm), unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
<b>Ciśnienie pracy</b>	1 to 8 bar
<b>Zakres temperatury</b>	-15 °C to +80 °C
<b>Obudowa</b>	Jacket made from anodised aluminium alloy
<b>taśma wewnętrzna/zewnętrzna</b>	Stainless steel
<b>sanie (prowadnica tłoka)</b>	Anodised aluminium alloy
<b>Materiał uszczelniający</b>	NBR for speeds up to 1 m/s

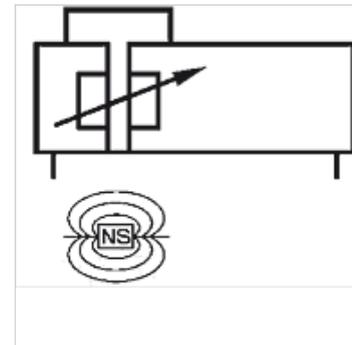

## Opis

These double-acting cylinders can also be supplied with strokes greater than 5 m, providing the stroke length is approximately equal to the overall length. They are equipped with magnets as standard for indicating the position as well as pneumatic, adjustable end position cushioning. Limit switches and hydraulic shock absorbers can be mounted as add-on modules.

## Wskazówki do zamówienia

All strokes can also be supplied in 1 mm steps on request. Ø 16 to 5000 mm, Ø 25, 32, 40 to 5700 mm and Ø 63 to 5500 mm. Versions with an integrated linear guide can be supplied on request (up to 50 x lateral load).

## Dodatkowe informacje

Important: The scope of supply does not include a connector. Please order separately.

## Artykuł

Oznaczenie	Siła 6bar (N)	Ø tłok	Skok (mm)	Przyłącze	maks. obciążenie boczne
K- 07 15 07 34	110	16 mm	100	M 5	0.3 Nm
K- 07 15 07 35	110	16 mm	200	M 5	0.3 Nm
K- 07 15 07 36	110	16 mm	300	M 5	0.3 Nm
K- 07 15 07 37	110	16 mm	400	M 5	0.3 Nm
K- 07 15 07 38	110	16 mm	500	M 5	0.3 Nm
K- 07 15 07 39	110	16 mm	600	M 5	0.3 Nm
K- 07 15 07 40	110	16 mm	700	M 5	0.3 Nm
K- 07 15 07 41	110	16 mm	800	M 5	0.3 Nm
K- 07 15 07 42	110	16 mm	900	M 5	0.3 Nm
K- 07 15 07 43	110	16 mm	1000	M 5	0.3 Nm
K- 07 15 07 44	110	16 mm	1200	M 5	0.3 Nm
K- 07 15 07 45	110	16 mm	1400	M 5	0.3 Nm
K- 07 15 07 46	110	16 mm	2000	M 5	0.3 Nm
K- 07 15 07 47	250	25 mm	100	G 1/8	1.0 Nm
K- 07 15 07 48	250	25 mm	200	G 1/8	1.0 Nm
K- 07 15 07 49	250	25 mm	300	G 1/8	1.0 Nm
K- 07 15 07 50	250	25 mm	400	G 1/8	1.0 Nm
K- 07 15 07 51	250	25 mm	500	G 1/8	1.0 Nm
K- 07 15 07 52	250	25 mm	600	G 1/8	1.0 Nm
K- 07 15 07 53	250	25 mm	700	G 1/8	1.0 Nm
K- 07 15 07 54	250	25 mm	800	G 1/8	1.0 Nm
K- 07 15 07 55	250	25 mm	900	G 1/8	1.0 Nm
K- 07 15 07 56	250	25 mm	1000	G 1/8	1.0 Nm
K- 07 15 07 57	250	25 mm	1200	G 1/8	1.0 Nm
K- 07 15 07 58	250	25 mm	1400	G 1/8	1.0 Nm
K- 07 15 07 59	250	25 mm	2000	G 1/8	1.0 Nm
K- 07 15 07 60	420	32 mm	100	G 1/4	2.0 Nm
K- 07 15 07 61	420	32 mm	200	G 1/4	2.0 Nm
K- 07 15 07 62	420	32 mm	300	G 1/4	2.0 Nm
K- 07 15 07 63	420	32 mm	400	G 1/4	2.0 Nm
K- 07 15 07 64	420	32 mm	500	G 1/4	2.0 Nm
K- 07 15 07 65	420	32 mm	600	G 1/4	2.0 Nm
K- 07 15 07 66	420	32 mm	700	G 1/4	2.0 Nm
K- 07 15 07 67	420	32 mm	800	G 1/4	2.0 Nm
K- 07 15 07 68	420	32 mm	900	G 1/4	2.0 Nm



Mimo starannego sprawdzenia nie możemy wykluczyć błędów i nie gwarantujemy prawidłowości podanych informacji.

26.05.2026

HANSA-FLEX AG

www.hansa-flex.com

1

# K-KOLST LOSE ZYL

Rodless cylinders

**HANSA FLEX**

## Artykuł

Oznaczenie	Siła 6bar (N)	Ø tłok	Skok (mm)	Przyłącze	maks. obciążenie boczne
K- 07 15 07 69	420	32 mm	1000	G 1/4	2.0 Nm
K- 07 15 07 70	420	32 mm	1200	G 1/4	2.0 Nm
K- 07 15 07 71	420	32 mm	1400	G 1/4	2.0 Nm
K- 07 15 07 72	420	32 mm	2000	G 1/4	2.0 Nm
K- 07 15 07 73	640	40 mm	100	G 1/4	4.0 Nm
K- 07 15 07 74	640	40 mm	200	G 1/4	4.0 Nm
K- 07 15 07 75	640	40 mm	300	G 1/4	4.0 Nm
K- 07 15 07 76	640	40 mm	400	G 1/4	4.0 Nm
K- 07 15 07 77	640	40 mm	500	G 1/4	4.0 Nm
K- 07 15 07 78	640	40 mm	600	G 1/4	4.0 Nm
K- 07 15 07 79	640	40 mm	700	G 1/4	4.0 Nm
K- 07 15 07 80	640	40 mm	800	G 1/4	4.0 Nm
K- 07 15 07 81	640	40 mm	900	G 1/4	4.0 Nm
K- 07 15 07 82	640	40 mm	1000	G 1/4	4.0 Nm
K- 07 15 07 83	640	40 mm	1200	G 1/4	4.0 Nm
K- 07 15 07 84	640	40 mm	1400	G 1/4	4.0 Nm
K- 07 15 07 85	640	40 mm	2000	G 1/4	4.0 Nm
K- 07 15 07 86	1550	63 mm	100	G 3/8	8.0 Nm
K- 07 15 07 87	1550	63 mm	200	G 3/8	8.0 Nm
K- 07 15 07 88	1550	63 mm	300	G 3/8	8.0 Nm
K- 07 15 07 89	1550	63 mm	400	G 3/8	8.0 Nm
K- 07 15 07 90	1550	63 mm	500	G 3/8	8.0 Nm
K- 07 15 07 91	1550	63 mm	600	G 3/8	8.0 Nm
K- 07 15 07 92	1550	63 mm	700	G 3/8	8.0 Nm
K- 07 15 07 93	1550	63 mm	800	G 3/8	8.0 Nm
K- 07 15 07 94	1550	63 mm	900	G 3/8	8.0 Nm
K- 07 15 07 95	1550	63 mm	1000	G 3/8	8.0 Nm
K- 07 15 07 96	1550	63 mm	1200	G 3/8	8.0 Nm
K- 07 15 07 97	1550	63 mm	1400	G 3/8	8.0 Nm
K- 07 15 07 98	1550	63 mm	2000	G 3/8	8.0 Nm

## Akcesoria

K-FUSSBEFESTIGUNG 4	Foot model
K-ZST	Intermediate foot
K-SENSOREN T-NUT 1	Sensor for T-slot
K-ABDECKBAENDER	Bar for grooving (500 mm)