# K-BKR KL SERIE 374


Ball valves, 374 series

HANSA FLEX

## Właściwości

| | |
|---|---|
| **Ciśnienie robocze** | max. 70 bar (Depending on Temperature) |
| **Temperatura robocza** | Max. 150 °C |
| **uszczelka** | PTFE |
| **dźwignia ręczna** | Stainless steel 1.4301 |



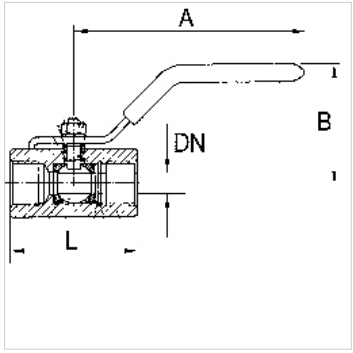


## Wskazówka

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)
Dalsze informacje na zapytanie.

## Wskazówki do zamówienia

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

## Dodatkowe informacje

G thread acc. DIN EN ISO 228-1

## Artykuł

| Oznaczenie | DN | Gwint | A (mm) | B (mm) | L (mm) | Materiał |
|---|---|---|---|---|---|---|
| **K- 07 30 15 32** | 5 | G 1/4 | 62,0 | 30,0 | 47,0 | Stainless steel 1.4401/1.4408 |
| **K- 07 30 15 33** | 7 | G 3/8 | 82,0 | 30,0 | 51,0 | Stainless steel 1.4401/1.4408 |
| **K- 07 30 15 34** | 9 | G 1/2 | 92,0 | 45,0 | 64,0 | Stainless steel 1.4401/1.4408 |
| **K- 07 30 15 35** | 13 | G 3/4 | 94,0 | 50,0 | 68,0 | Stainless steel 1.4401/1.4408 |

*Mimo starannego sprawdzenia nie możemy wykluczyć błędów i nie gwarantujemy prawidłowości podanych informacji.*