



# K-WTST SAFETY BK SCHA AN DR HANSA

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and pressure regulator

**HANSA FLEX**

## Właściwości

|                                       |   |
|---------------------------------------|---|
| Ciśnienie wejściowe                   | 2.5 - 16 bar  |
| ciśnienie wyjściowe                   | 0.5 - 8 bar   |
| Zakres temperatury                    | -10 °C to +50 °C  |
| Czynniki robocze                      | sprężone powietrze  |
| Materiał uszczelniający               | NBR   |
| Gwint przyłącza                       | Material: Die-cast zinc   |
| zbiornik                              | Polycarbonate (with bayonet lock) and bowl guard                  |
| element filtr.                        | Cellpor (PE) 5 µm   |
| Obudowa                               | Material: Grivory® (PA 66)  |
| Przepona                              | NBR   |
| Zużycie własne powietrza              | Max. 1.5 l/min (depending on secondary pressure)                  |
| pomiar wartości przepływu             | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |
| przył. odpow. kurek z czopem kulistym | Silencer  |

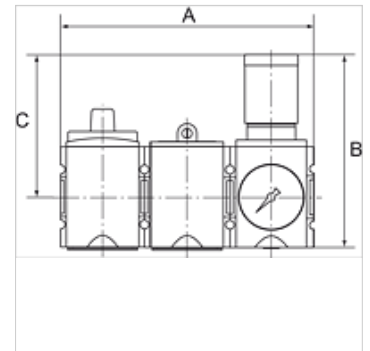

## Wskazówka

Dalsze informacje na zapytanie.

## Opis

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

## Wskazówki do zamówienia

The price does not include a key lock and padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit

## Artykuł

| Oznaczenie     | Gwint | Zakres regulacji | Przepływ (L/min) | A (mm) | B        | C (mm) |
|----------------|-------|------------------|------------------|--------|----------|--------|
| K- 07 25 15 20 | G 1/4 | 2.5 - 8 bar      | 2000             | 156,0  | 128,5 mm | 95,5   |
| K- 07 25 15 21 | G 3/8 | 2.5 - 8 bar      | 2000             | 156,0  | 128,5 mm | 95,5   |
| K- 07 25 15 22 | G 3/8 | 2.5 - 8 bar      | 4300             | 189,0  | 149,5 mm | 110,0  |
| K- 07 25 15 23 | G 1/2 | 2.5 - 8 bar      | 4300             | 189,0  | 149,5 mm | 110,0  |
| K- 07 25 15 24 | G 3/4 | 2.5 - 8 bar      | 10000            | 255,0  | 191,0 mm | 137,0  |
| K- 07 25 15 25 | G 1   | 2.5 - 8 bar      | 10000            | 255,0  | 191,0 mm | 137,0  |

## Akcesoria

|                    |          |
|--------------------|----------|
| K-STECKSCHLOSS     | Key lock |
| K-VORHAENGESCHLOSS | Padlock  |