


# K-X-STECKVERBINDUNG 1

X-unions

**HANSA FLEX**

## Właściwości

Ciśnienie pracy	Max. 16 bar
Temperatura robocza	-20 °C to +80 °C
Materiał	mosiądz niklowany
pierścień dociskowy	Hostaform
pierścień zaciskowy	Stainless steel

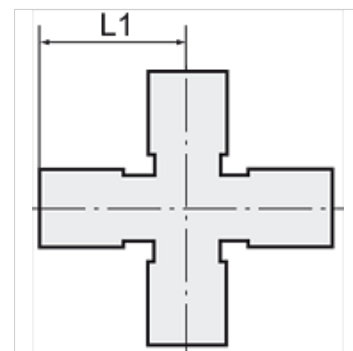

## Wskazówka

Dalsze informacje na zapytanie.

## Opis

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Artykuł

Oznaczenie	do średnicy zewnętrznej węża Ø mm	L1 (mm)
K- 07 40 47 29	4 mm	18,6
K- 07 40 47 30	6 mm	21,9
K- 07 40 47 31	8 mm	25,4