
K-T-VB PP
Union tees

HANSA-FLEX

Właściwości

Ciśnienie pracy	on request
Temperatura robocza	Max. +20 °C
Materiał	Polypropylene (PP)
Materiał uszczelniający	NBR



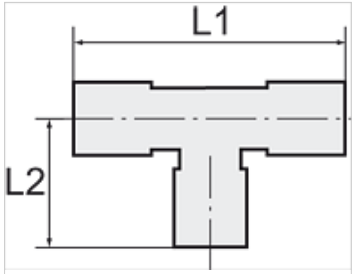

Wskazówka

Dalsze informacje na zapytanie.

Opis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Artykuł

Oznaczenie	do średnicy zewnętrznej węża Ø mm	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7

Mimo starannego sprawdzenia nie możemy wykluczyć błędów i nie gwarantujemy prawidłowości podanych informacji.