


# K-L-AGR-K OR DRH VA

Male run tees, conical male thread acc. to ISO 7-1, stainless steel

**HANSA FLEX**

## Właściwości

<b>Zakres ciśnienia</b>	Max. 25 bar
<b>zalecane węże</b>	PTFE hose
<b>Zakres temperatury</b>	-40 °C to +200 °C (depending on the hose quality and diameter)
<b>Materiał</b>	stal szlachetna 1.4404
<b>uszczelka</b>	Pure metal

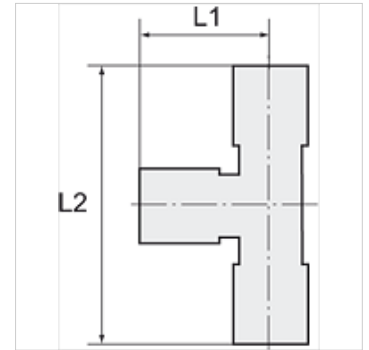

## Wskazówka

Dalsze informacje na zapytanie.

## Opis

Supplied without seals. For use with corrosive media and at high temperatures. Screw fitting series made of stainless steel for all applications where compliance with strict tightness, pressure and temperature requirements is essential. The parts are manufactured without rubber seals, in other words they are ideal for very high temperatures or for use with corrosive liquids, e.g. in cases when FPM is no longer suitable.

## Artykuł

Oznaczenie	Gwint	dla węża	L1 (mm)	L2 (mm)	RK1 (mm)	RK2 (mm)
K- 07 40 30 51	R 1/8	6 mm / 4 mm	23,0	40,0	12	10
K- 07 40 30 52	R 1/8	8 mm / 6 mm	23,0	40,0	14	10
K- 07 40 30 49	R 1/4	6 mm / 4 mm	23,0	44,5	12	10
K- 07 40 30 50	R 1/4	8 mm / 6 mm	23,0	44,5	14	10
K- 07 40 30 48	R 1/4	10 mm / 8 mm	26,0	47,5	16	12