


# K-SCHL-AUFROLLER LU WA S

Hose reels for compressed air and water, heavy-duty type

**HANSA FLEX**

## Właściwości

|                            |                        |
|----------------------------|------------------------|
| <b>Materiał węża</b>       | Polyurethane           |
| <b>Ciśnienie robocze</b>   | maks. 10 bar           |
| <b>Temperatura robocza</b> | -10 °C to +40 °C       |
| <b>Zamocowanie</b>         | Wall, floor or ceiling |
| <b>Wejście</b>             | Hose stem 8 mm         |

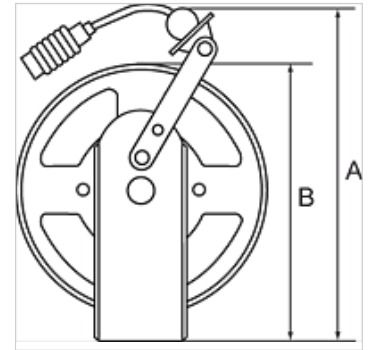

## Wskazówka

Dalsze informacje na zapytanie.

## Opis

Heavy-duty steel design for industrial applications. Blue, powder-coated housing. An automatic latching mechanism allows the hose to be engaged at any length. Enclosed spring. Precise locking device for continuous feeding or latching mechanism. Reel guide prevents excessive wear on the hose.

## Artykuł

| Oznaczenie     | Wymiar węża    | A<br>(mm) | B<br>(mm) | Długość węża<br>(m) |
|----------------|----------------|-----------|-----------|---------------------|
| K- 07 10 06 24 | 10 mm x 6,5 mm | 420,0     | 353,0     | 10                  |
| K- 07 10 06 25 | 10 mm x 6,5 mm | 420,0     | 353,0     | 20                  |
| K- 07 10 06 26 | 12 mm x 8 mm   | 420,0     | 353,0     | 15                  |
| K- 07 10 06 27 | 16 mm x 11 mm  | 420,0     | 353,0     | 15                  |